





ARTÍCULO

Eave Ventilation Grill iTR For Onduline


SCHEME

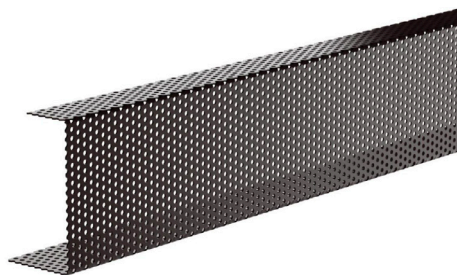

Folded:



Unfolded:

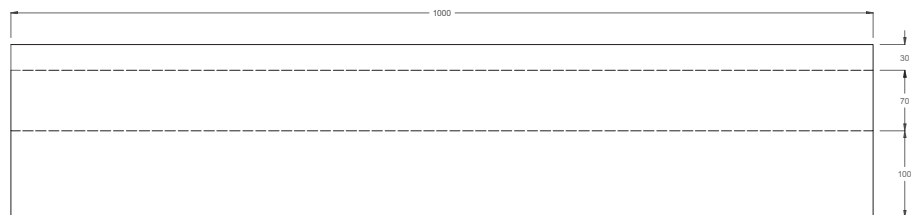

CHARACTERISTICS

Material

Stainless Steel AISI 304

Finishing

Lacquered in brown

Declared characteristics

Length: 1000 mm

Height: 70 mm

Base: 100 mm

Top folding angle: 2,85° (5%)

Thickness: 1 mm

Lower folding angle: 90°

Intercrystalline corrosion resistance: According UNI EN ISO 3651-2

DESCRIPTION

Eave ventilation grill for installation of any type of tile on battens with Onduline BT150 Plus waterproofing sheet.

APPLICATION

In the installation of tiles on batten, replace the eave batten, avoiding the pitching of the first tile. In addition, it guarantees the ventilation of the roof and hides the waterproofing sheet. In the case of barrel or mixed tiles, and to avoid the entry of birds, it must be complemented with the eaves comb.

FTPE-227 Ed.1 30/06/2021