




ARTÍCULO

Bracket screw

SCHEME

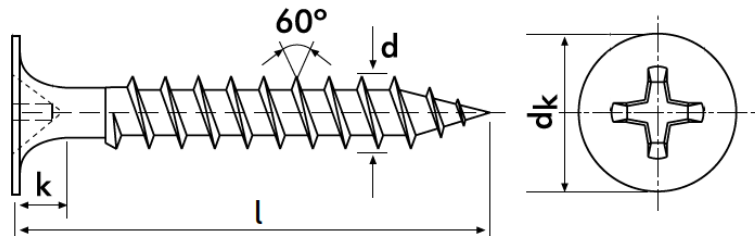

CHARACTERISTICS

Material

Steel phosphated

Declared characteristics

d: 3,50 mm
dk: 7,80 mm
k: 5,00 mm
L: 35 mm

Treatment

GEOMET® 500

- Coating obtained from materials in aqueous phase
- Sheets of zinc and aluminum joined and passivated, patented chemistry
- Metallic silver color
- Coefficient of friction: $0,15 \pm 0,03$ (ISO 16047)
- Without embrittlement to hydrogen
- Excellent behavior in the joints and in the multi-bolting
- Good behavior against mechanical attacks (method D24 1312) and chemical (test VDA 621-412)
- Preservation of coating performance after exposure up to 300°C
- Electrical conductivity responding to most applications
- Bimetallic compatibility with aluminum

OBSERVATIONS

PH bugle head twin fast fine thread drywall screws. The GEOMET® 500 treatment protects the screw from the corrosion.