



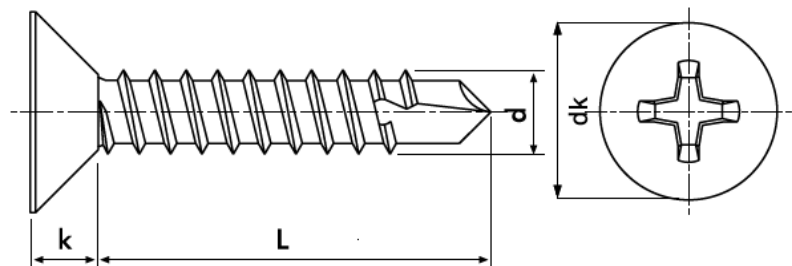

## ARTÍCULO

### Hip-ridge & rake screw

## SCHEME

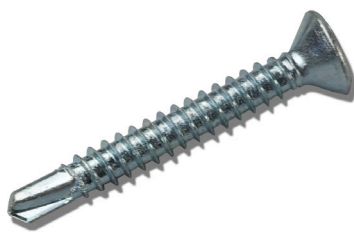

## CHARACTERISTICS

### Material

Stainless steel A2; A4;

### Declared characteristics

d:	4,80 mm
dk:	9,50 mm
k:	2,80 mm
L:	38 mm

### Treatment

GEOMET® 500

- Coating obtained from materials in aqueous phase
- Sheets of zinc and aluminum joined and passivated, patented chemistry
- Metallic silver color
- Coefficient of friction:  $0,15 \pm 0,03$  (ISO 16047)
- Without embrittlement to hydrogen
- Excellent behavior in the joints and in the multi-bolting
- Good behavior against mechanical attacks (method D24 1312) and chemical (test VDA 621-412)
- Preservation of coating performance after exposure up to 300°C
- Electrical conductivity responding to most applications
- Bimetallic compatibility with aluminum

## OBSERVATIONS

Self drilling cross recessed countersunk head screw (4,8x38mm). The GEOMET® 500 treatment protects the screw from corrosion.