

AENOR



AENOR Product Certificate



034/002020

AENOR certifies that the organization

TEJAS VEREA, S.A.U.

registered office LANZÁ, S/N 15685 MESÍA (A Coruña - España)

supplies **Clay roofing tiles and fittings**

in compliance with UNE-EN 1304:2020 (EN 1304:2013)

Nº Technical Form 0310223 (see annex)


Production site LANZÁ, S/N 15685 MESÍA (A Coruña - España)

Certification scheme This Certificate has been granted in accordance with the stipulations of AENOR Specific Rules RP 034.02

This certificate supersedes 034/002020, dated 2025-09-25

First issued on 2023-12-12
Modified on 2026-07-27
Validity 2031-07-27


Rafael GARCÍA MEIRO
CEO



AENOR CONFÍA S.A.U.
Génova, 6. 28004 Madrid. España
Tel. 91 432 60 00.- www.aenor.com

AENOR MARK FOR CLAY ROOFING TILES AND FITTINGS

TECHNICAL FORM N°: 0310223

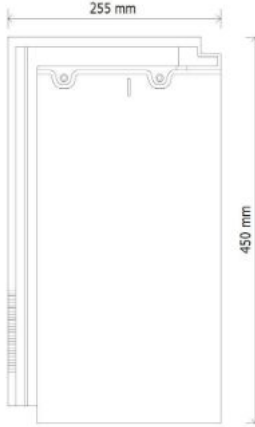Stamp and signature:	MANUFACTURER:	TEJAS VERA, S.A.U.																							
	MADE IN:	LANZÁ, S/N-15685 MESIA (A CORUÑA)																							
	TILE DESCRIPTION:	PLAIN CLAY ROOF TILE WITH SIDELOCK AND HEADLOCK EN 1304																							
	BRAND NAME:	TEJA PLANA ETERNAL																							
	PRODUCT TECHNICAL CHARACTERISTICS																								
MANUFACTURER GUARANTEED VALUES					AENOR REQUIRED VALUES																				
REQUIRED																									
Nominal dimensions (mm)																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;"></td> <td style="width: 10%; text-align: center;">Length</td> <td style="width: 10%; text-align: center;">Width</td> <td colspan="2"></td> </tr> <tr> <td>Individuals</td> <td style="text-align: center;">X</td> <td style="text-align: center;">450</td> <td style="text-align: center;">255</td> <td></td> </tr> <tr> <td>Overlap</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>						Length	Width			Individuals	X	450	255		Overlap										
	Length	Width																							
Individuals	X	450	255																						
Overlap																									
Over and Under Tiles																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%; text-align: center;">Maximum width</td> <td style="width: 20%; text-align: center;">Minimum width</td> <td colspan="2"></td> </tr> <tr> <td></td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td colspan="2"></td> </tr> </table>						Maximum width	Minimum width				-	-													
	Maximum width	Minimum width																							
	-	-																							
Impermeability																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Category 1</td> <td style="width: 10%; text-align: center;">X</td> <td style="width: 20%;">Test method 1</td> <td style="width: 10%; text-align: center;">X</td> <td></td> </tr> <tr> <td>Category 2</td> <td></td> <td>Test method 2</td> <td></td> <td></td> </tr> </table>					Category 1	X	Test method 1	X		Category 2		Test method 2													
Category 1	X	Test method 1	X																						
Category 2		Test method 2																							
Frost resistance																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 40%;">Level 1 (n° cycles without damages ≥ 150)</td> <td style="width: 10%; text-align: center;">X</td> <td colspan="3"></td> </tr> <tr> <td>Level 2 (n° cycles without damages ≥ 90)</td> <td></td> <td colspan="3"></td> </tr> </table>					Level 1 (n° cycles without damages ≥ 150)	X				Level 2 (n° cycles without damages ≥ 90)															
Level 1 (n° cycles without damages ≥ 150)	X																								
Level 2 (n° cycles without damages ≥ 90)																									
OPTIONAL CHARACTERISTICS ANNEX D RP 34 02																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;"></td> <td style="width: 10%; text-align: center;">YES</td> <td style="width: 10%; text-align: center;">NO</td> <td colspan="2"></td> </tr> <tr> <td>Impermeability (D.2 RP 34.02)</td> <td></td> <td style="text-align: center;">X</td> <td colspan="2"></td> </tr> <tr> <td>Frost Resistance (D.3 RP 34.02)</td> <td></td> <td style="text-align: center;">X</td> <td colspan="2"></td> </tr> </table>						YES	NO			Impermeability (D.2 RP 34.02)		X			Frost Resistance (D.3 RP 34.02)		X								
	YES	NO																							
Impermeability (D.2 RP 34.02)		X																							
Frost Resistance (D.3 RP 34.02)		X																							
TILE SKETCH																									
																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">Flexural strenght (N)</td> <td style="text-align: center;">EN 538</td> <td style="text-align: center;">≥ 900</td> <td style="text-align: center;">≥ 900</td> </tr> <tr> <td colspan="2" style="text-align: center;">Frost resistance (cycles)</td> <td style="text-align: center;">EN 539-2</td> <td style="text-align: center;">1000</td> <td style="text-align: center;">≥ 150</td> </tr> <tr> <td colspan="2" style="text-align: center;">Fire reaction performance</td> <td style="text-align: center;">EN 13501-1</td> <td style="text-align: center;">A1</td> <td style="text-align: center;">A1</td> </tr> <tr> <td colspan="2" style="text-align: center;">External fire performance</td> <td style="text-align: center;">EN 13501-5</td> <td style="text-align: center;">Broof (t1/t2/t3)</td> <td style="text-align: center;">Broof (t1/t2/t3)</td> </tr> </table>					Flexural strenght (N)		EN 538	≥ 900	≥ 900	Frost resistance (cycles)		EN 539-2	1000	≥ 150	Fire reaction performance		EN 13501-1	A1	A1	External fire performance		EN 13501-5	Broof (t1/t2/t3)	Broof (t1/t2/t3)	
Flexural strenght (N)		EN 538	≥ 900	≥ 900																					
Frost resistance (cycles)		EN 539-2	1000	≥ 150																					
Fire reaction performance		EN 13501-1	A1	A1																					
External fire performance		EN 13501-5	Broof (t1/t2/t3)	Broof (t1/t2/t3)																					
Additional information given by the manufacturer ⁽¹⁾																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">Unitary mass (in grams):</td> <td style="text-align: center;">3300</td> </tr> <tr> <td>Roof tiles number in m² (with one decimal):</td> <td style="text-align: center;">12</td> </tr> <tr> <td>Length distance between battens (cm):</td> <td style="text-align: center;">variable according to overlap (38-32)</td> </tr> <tr> <td>Surface finish:</td> <td style="text-align: center;">decoration with colored engobe</td> </tr> <tr> <td>Mass coloration:</td> <td style="text-align: center;">red, brown</td> </tr> <tr> <td>Fixing types:</td> <td style="text-align: center;">hook, screws, polyurethane foam and polymers</td> </tr> <tr> <td colspan="2">Further information:</td> </tr> </table>					Unitary mass (in grams):	3300	Roof tiles number in m ² (with one decimal):	12	Length distance between battens (cm):	variable according to overlap (38-32)	Surface finish:	decoration with colored engobe	Mass coloration:	red, brown	Fixing types:	hook, screws, polyurethane foam and polymers	Further information:								
Unitary mass (in grams):	3300																								
Roof tiles number in m ² (with one decimal):	12																								
Length distance between battens (cm):	variable according to overlap (38-32)																								
Surface finish:	decoration with colored engobe																								
Mass coloration:	red, brown																								
Fixing types:	hook, screws, polyurethane foam and polymers																								
Further information:																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">Accessories:</td> </tr> <tr> <td colspan="2" style="text-align: center;">Half Tile, Ridge Tile, Hip Start, Ridge Cap, 3- and 4-water meeting, universal side finish</td> </tr> </table>					Accessories:		Half Tile, Ridge Tile, Hip Start, Ridge Cap, 3- and 4-water meeting, universal side finish																		
Accessories:																									
Half Tile, Ridge Tile, Hip Start, Ridge Cap, 3- and 4-water meeting, universal side finish																									

⁽¹⁾ This information is out of the AENOR Mark and ENAC accreditation scopes. AENOR is not responsible for the information in this square