
TECHNICAL SPECIFICATION SHEET


ARTÍCLE

Universal Eave Ventilation Grill iTR


Folded:



SCHEME

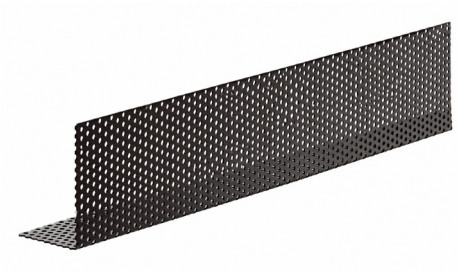

Unfolded:

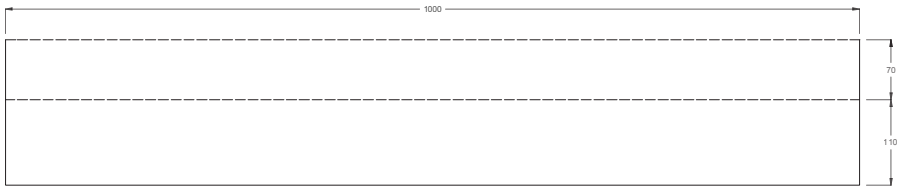

CHARACTERISTICS

Material

Stainless Steel AISI 304

Finishing

Lacquered in brown

Declared characteristics

Lenght: 1000 mm

Base: 110 mm

Thickness: 1 mm

Height: 105 mm

Lower folding angle: 90º

Intercrystalline corrosion resistance: According UNI EN ISO 3651-2

DESCRIPTION

Ventilated eaves batten for installing any type of roof tile on battens over Onduline BT150 Plus waterproofing sheets and corrugated fibre cement sheets (profiles 177, 190, 200, 230 and 235).

APPLICATION

When installing roof tiles on battens, it can replace the eaves batten, preventing the first row of tiles from tilting. It also ensures proper roof ventilation and conceals the waterproofing sheet. For barrel or mixed roof tiles, it must be combined with a bird comb installed on a 40 × 25 mm eaves batten to prevent birds from entering.

TEJAS VEREA, S.A.U.
Lanzá s/n, 15685 Mesía, A Coruña (España). C.I.F.: A-15158405. Reg. Merc. de A Coruña, Tomo 650, Libro 357, Folio 90, Hoja 3984
Telf: 981 687 053, Email: info@tejasverea.com | **www.tejasverea.com**